


Technical Data Sheet

Date of Issue 02/05/2018

Rev. 03_16/07/2024

T203

Painter's Basic Medium/High Adhesion Masking Tape

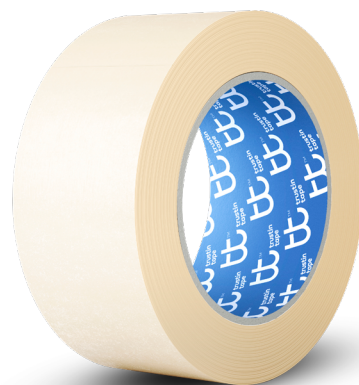

Product Description

Painter's Basic medium/high adhesion masking tape characterized by a consistent crepe paper backing and a natural rubber adhesive. Able to conform on irregular surfaces, resist to tractions and abrasions, it is suitable for indoor applications, for masking and painting operations in painting and renovation, and for non critical bundling, holding, splicing, and labeling. Capable to exposure ultra-violet (UV) light for up to five hours.

Recommended to be removed within 24 hours.

FSC® and PEFC certified masking tapes available on demand.

Features

- Medium/high adhesion
- Consistent paper for higher traction and abrasion
- resistance
- Easy to tear
- High conformability
- Clean removal
- Excellent contact on multiple surfaces
- Good paint anchorage

Main Applications

- Masking and painting in DIY and Professional operations (no UV exposure recommended)
- Non - critical bundling, splicing and holding
- Temporary labeling and marking activities

Technical Data

| | Metric | Imperial Units | Test Method |
|--------------------------|------------|----------------|---------------------|
| Total weight* | 81 g/m2 | 81 g/m2 | ISO 536 |
| Total thickness* | 115 µm | 4.5 mils | Internal |
| MD tensile strength* | 38 N/cm | 21.7 Lbs/in | AFERA 5004/PSTC 131 |
| MD elongation at break* | 7 % | 7 % | AFERA 5004/PSTC 131 |
| Adhesion to steel plate* | 2.4 N/cm | 21.9 oz/in | AFERA 5001/PSTC 101 |
| Service temperature | up to 60°C | up to 140°F | |

Backing material
Saturated crepe paper

Type of adhesive
Natural rubber

*Typical value

Available colour



Technical Information and Product Use

All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. Figures shown refer to average values only, based on tests carried out in conditioned laboratory and are not valid for specification. The company reserves the right to modify or change the products at any time without notice. The accuracy or completeness of such information is not guaranteed. The technical information, suggestions and other statements contained in this document have been compiled for your guidance and usage. TTPL reminds the user of the products to make sure that the product is used as per the instructions and suggestions provided. It is the user's sole responsibility to determine the suitability of the product in actual application under specific conditions.

Storage and Shelf Life

Suggested storage in dry area away from direct sunlight temperature should range from 59°F / 15°C to 77°F / 25°C with max relative humidity of 50%. Tape and jumbo roll should be used respectively within 12 months and 6 months from date of manufacture. TTPL does not take responsibility for the defective material if is not stored and used in accordance with the conditions listed above.